



- Everything You Need
- Style You Don't Need to Hide
- 3 Year Warranty

Elo PayPoint® for Windows® All-in-One Point-of-Sale Platform

All-in-one, the Elo PayPoint is your register, cash drawer, credit card reader, barcode scanner, receipt printer, and customer facing display for your favorite point-of-sale (POS) software application. PayPoint integrates with all your back-office applications, leveraging the management and security of Microsoft Windows.

Designed for ease of serviceability, PayPoint provides easy access to memory and storage compartments. Performance for point of sale applications is powered by an Intel Celeron quad-core processor. The flip-for-signature touch screen encourages shopper engagement and electronic receipt delivery. Retail peripheral expansion is supported by additional serial and USB connections.



PRODUCT OVERVIEW

What You Can Do:

- Deploy your favorite POS software on a stylish all-in-one platform that works as good as it looks
- Accept new forms of payment
- Deploy proximity marketing
- Integrate required POS peripherals
- Stay connected wirelessly

What's Included:

- Flip for Signature 13-inch Touchscreen
- Cash Drawer
- Credit Card Reader
- Barcode Scanner
- Receipt Printer
- Customer Facing Display
- Wi-Fi Wireless Networking
- Bluetooth 4.0 and USB 2.0 connectivity for EMV payment terminals and other POS accessories
- NFC accessory option for contactless payments and proximity marketing

Why It's Better:

- All-in-one, everything you need
- Modern style you don't need to hide
- Professional product built to last
- 3-year warranty

Elo PayPoint® for Windows®

Specifications	
Color	White
Processor	Intel 2 GHz Celeron Quad-Core J1900; 2MB L2 Cache; fanless
Memory (RAM)	4GB 1600MHz DDR3L SO-DIMM on 1 slot (upgradeable to 8GB)
Storage	320GB 2.5" 5400rpm SATA HDD
Display	13.3" diagonal, Active matrix TFT LCD (LED), 16x9
Useful Screen Area (W x H)	11.55" x 6.50" (293.47mm x 165.08mm)
Native (optimal) Resolution	Full HD 1920 x 1080
Colors	262,144
Touch Technology	IntelliTouch Pro zero-bezel 10-touch projected capacitive (PCAP)
Brightness (typical)	LCD panel: 400 nits; IntelliTouch Pro: 375 nits
Response Time-total (typical)	25ms
Viewing Angle (typical)	Horizontal: 170° Vertical: 170°
Contrast Ratio (typical)	700:1
Connectivity	Wi-Fi 802.11ac & Bluetooth 4.0
Serial Ports	1 x native serial port (RJ-45) with DB9 adapter cable included
USB Ports	1 x USB 3.0 (side) and 2 x USB 2.0 (bottom)
Ethernet Port	1 x LAN RJ45 (Gigabit)
Cash Drawer	4 bill trays, 5 coin compartments, 1 check slot, mechanical locking key
Printer	Thermal 2 1/4" (58mm); accepts 2-inch (50mm) thermal paper roll
Bar Code Reader	1D Scanner
MSR	3-track encryptable - encryption key and verification of encryption is customer responsibility
Customer Facing Display	2 line, 16 character display
Operating System Options	No Operating System; Windows Embedded POSReady 7; Windows Embedded Enterprise 7
Dimensions	13.5" x 15.7" (343mm x 399mm)
Weight	14.4 lbs (6.51kg) unpackaged; 20.0 lbs (9.07kg) packaged
Shipping Box Dimensions	18.9" x 11.2" x 16.5" (480mm x 285mm x 420mm)
Temperature	Operating: 32°F to 95°F (0°C to 35°C); Storage -4°F to 140°F (-20°C to 60°C)
Humidity (non-condensing)	Operating: 10% to 90%; Storage: 0% to 95%
Warranty	3 years
MTBF	50,000 hours demonstrated
Power Supply	Internal AC input voltage: 100-240VAC; Input frequency: 50-60Hz; 75W max.

To find out more about our extensive range of Elo touch solutions, go to www.elotouch.com, or call the office nearest you.

North America

Elo Touch Solutions
1033 McCarthy Boulevard
Milpitas, CA 95035

800-ELO-TOUCH

Tel +1 408 597 8000
Fax +1 408 597 8050
customerservice@elotouch.com

Europe

Tel +32 (0)16 70 45 00
Fax +32 (0)16 70 45 49
elosales@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385
Fax +86 (21) 3329 1400
www.elotouch.com.cn

Latin America

Tel 786-923-0251
Fax 305-931-0124
www.elotouch.com

Intellectual Property Notice

This product is protected by a number of patent, trademark and design registrations globally.

Copyright 2015 Elo Touch Solutions, Inc. 1033 McCarthy Boulevard, Milpitas, CA 95035. Elo PayPoint and PayPoint are trademarks of Elo and its Affiliates. Other trademarks and brands are the property of their respective owners. DS000105, rev B 05/15






- Everything You Need
- Style You Don't Need to Hide
- 3 Year Warranty

Elo PayPoint® for Android™ All-in-One Point-of-Sale Platform

All-in-one, the Elo PayPoint is your register, cash drawer, credit card reader, barcode scanner, receipt printer, and customer facing display for your favorite Android point-of-sale (POS) software application.

Designed for ease of serviceability, PayPoint provides easy access to memory and storage compartments. The flip-for-signature touch screen encourages shopper engagement and electronic receipt delivery.

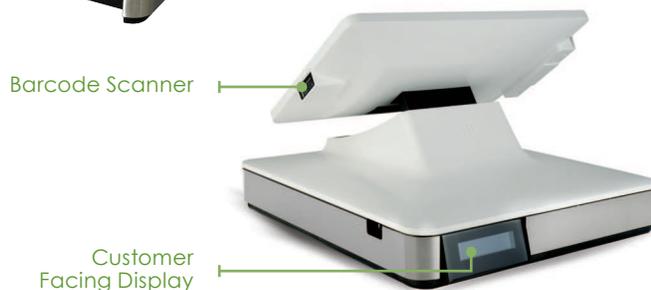

PRODUCT OVERVIEW

What You Can Do:

- Deploy your favorite POS software on a stylish all-in-one platform that works as good as it looks
- Accept new forms of payment
- Deploy proximity marketing
- Integrate required POS peripherals
- Stay connected wirelessly

What's Included:

- Flip for Signature 13-inch Touchscreen
- Cash Drawer
- Credit Card Reader
- Barcode Scanner
- Receipt Printer
- Customer Facing Display
- Wi-Fi Wireless Networking
- NFC accessory option for contactless payments and proximity marketing

Why It's Better:

- All-in-one, everything you need
- Modern style you don't need to hide
- Professional product built to last
- 3-year warranty

Elo PayPoint® for Android™

Specifications	
Color	White
Processor	ARM A9 2GHz Dual-Core Processor
Memory (RAM)	1GB
Storage	16GB SSD
Display	13.3" diagonal, Active matrix TFT LCD (LED), 16x9
Useful Screen Area (W x H)	11.55" x 6.50" (293.47mm x 165.08mm)
Native (optimal) Resolution	Full HD 1920 x 1080
Colors	262,144
Touch Technology	IntelliTouch Pro zero-bezel 10-touch projected capacitive (PCAP)
Brightness (typical)	LCD panel: 400 nits; IntelliTouch Pro: 375 nits
Response Time-total (typical)	25ms
Viewing Angle (typical)	Horizontal: 170° Vertical: 170°
Contrast Ratio (typical)	700:1
Connectivity	Wi-Fi 802.11ac
USB Ports	1 x USB 2.0 (side)
Ethernet Port	1 x LAN RJ45 (Gigabit)
Cash Drawer	4 bill trays, 5 coin compartments, 1 check slot, mechanical locking key
Printer	Thermal 2 1/4" (58mm); accepts 2-inch (50mm) thermal paper roll
Bar Code Reader	1D Scanner
MSR	3-track encryptable - encryption key and verification of encryption is customer responsibility
Customer Facing Display	2 line, 16 character display
Operating System	Google Android™ 4.0 Ice Cream Sandwich
Dimensions	13.5" x 15.7" (343mm x 399mm)
Weight	14.1 lbs (6.39kg) unpackaged; 19.0 lbs (8.62kg) packaged
Shipping Box Dimensions	18.97" x 13.85" x 17.40" (482mm x 352mm x 442mm)
Temperature	Operating: 32°F to 95°F (0°C to 35°C); Storage -4°F to 140°F (-20°C to 60°C)
Humidity (non-condensing)	Operating: 20% to 80%; Storage: 5% to 95%
Warranty	3 years
MTBF	50,000 hours demonstrated
Power Supply	Internal AC input voltage: 100-240VAC; Input frequency: 50-60Hz; 20W max.

To find out more about our extensive range of Elo touch solutions, go to www.elotouch.com, or call the office nearest you.

North America

Elo Touch Solutions
1033 McCarthy Boulevard
Milpitas, CA 95035

800-ELO-TOUCH

Tel +1 408 597 8000
Fax +1 408 597 8050
customerservice@elotouch.com

Europe

Tel +32 (0)16 70 45 00
Fax +32 (0)16 70 45 49
elosales@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385
Fax +86 (21) 3329 1400
www.elotouch.com.cn

Latin America

Tel 786-923-0251
Fax 305-931-0124
www.elotouch.com

Intellectual Property Notice

This product is protected by a number of patent, trademark and design registrations globally.

Copyright 2015 Elo Touch Solutions, Inc. 1033 McCarthy Boulevard, Milpitas, CA 95035. Elo PayPoint and PayPoint are trademarks of Elo and its Affiliates. Other trademarks and brands are the property of their respective owners. DS000112, rev A 05/15





- Integrated Point of Sale Dock for the Apple iPad®
- Style You Don't Need to Hide
- 3 Year Warranty



Elo PayPoint® for the Apple iPad®

All-in-one, Elo PayPoint for the Apple iPad integrates cash drawer, credit card reader, barcode scanner, receipt printer, and customer facing display, for your favorite Apple iOS point-of-sale (POS) software application.

The flip-for-signature docking tray for the Apple iPad encourages shopper engagement and electronic receipt delivery. Retail peripheral expansion is supported by an additional serial port. iPad charging supported when docked.



PRODUCT OVERVIEW

What You Can Do:

- Deploy your favorite POS software on a stylish all-in-one platform that works as good as it looks
- Accept new forms of payment
- Deploy proximity marketing
- Integrate required POS peripherals
- Stay connected wirelessly

What's Included:

- Docking tray that accepts Apple iPad 4, iPad Air, or iPad Air 2
- Cash Drawer
- Credit Card Reader
- Barcode Scanner
- Receipt Printer
- Customer Facing Display
- NFC accessory option for contactless payments (Apple Pay™) and proximity marketing

Why It's Better:

- All-in-one, everything you need
- Modern style you don't need to hide
- Professional product built to last
- 3-year warranty



Elo PayPoint® for the Apple iPad®

Specifications	
Color	White
Apple iPad Support	iPad 4, iPad Air, iPad Air 2
Apple iPad Charging	2.5A with overcurrent protection via Lightning® connector
PayPoint Dock Integration	iOS SDK for POS software interface to hardware peripherals inclusive of diagnostic application and source code
Flip-for-Signature	Docking tray tilts -40 to +45 degrees
Connectivity	Wi-Fi, Bluetooth or 3G/4G LTE via Apple iPad
Serial Ports	1 x native serial port (RJ-45)
USB Ports	1 for accessory charging only (1A 5W)
Ethernet Port	None. iPad does not support Ethernet.
Cash Drawer	4 bill trays, 5 coin compartments, 1 check slot, mechanical locking key
Printer	Thermal 2 1/4" (58mm); accepts 2-inch (50mm) thermal paper roll
Bar Code Reader	1D Scanner
MSR	3-track encryptable - encryption key and verification of encryption is customer responsibility
Customer Facing Display	2 line, 16 character display
Dimensions	13.5" x 15.7" (343mm x 399mm)
Weight	12.75 lbs (5.8 kg) unpackaged; 16.5 lbs (7.5 kg) packaged
Shipping Box Dimensions	18.97" x 13.85" x 17.40" (482mm x 352mm x 442mm)
Temperature	Operating: 32°F to 95°F (0°C to 35°C); Storage -4°F to 140°F (-20°C to 60°C)
Humidity (non-condensing)	Operating: 20% to 80%; Storage: 5% to 95%
Warranty	3 years
MTBF	50,000 hours demonstrated
Power Supply	Internal AC input voltage: 100-240VAC; Input frequency: 50-60Hz; 30W max.



To find out more about our extensive range of Elo touch solutions, go to www.elotouch.com, or call the office nearest you.

North America

Elo Touch Solutions
1033 McCarthy Boulevard
Milpitas, CA 95035

800-ELO-TOUCH

Tel +1 408 597 8000

Fax +1 408 597 8050

customerservice@elotouch.com

Europe

Tel +32 (0)16 70 45 00

Fax +32 (0)16 70 45 49

elosales@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385

Fax +86 (21) 3329 1400

www.elotouch.com.cn

Latin America

Tel 786-923-0251

Fax 305-931-0124

www.elotouch.com

Elo Touch Solutions, Inc. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Elo (logo) and Elo Touch Solutions are trademarks of Elo Touch Solutions, Inc. Copyright 2015 Elo Touch Solutions, Inc. All rights reserved. DS000108, rev B 07/15

